SpiralTrac™ for

GOULDS® 3405

Double Suction Centrifugal Pumps

Packing Version and Seal Version SpiralTracs, specifically designed for GOULDS Model 3405 double suction centrifugal pumps!

Benefits

- Reduced flush rate with the use of a flow controller Eliminates seal and cavity erosion (seal)
- Increased MTBF
- Reduced shaft or sleeve wear


- Fewer gland adjustments (packing)
- Controlled drip rate leakage (packing)



F11750RS2500(ESC)

GOULDS Model	SpiralTrac part # Seal Version* (Version F)		SpiralTrac part # Packing Version	
	Left Rotation (CCW)	Right Rotation (CW)	Left Rotation (CCW)	Right Rotation (CW)
3405 S	FI1375LS2000(XXX)	FI1375RS2000(XXX)	PI1375LS2000(XXX)0L1.250	PI1375RS2000(XXX)0L1.250
3405 M	FI1750LS2500(XXX)	FI1750RS2500(XXX)	PI1750LS2500(XXX)25173	PI1750RS2500(XXX)25173
3405 L	FI2500LS3250(XXX)	FI2500RS3250(XXX)	PI2500LS3250(XXX)25174	PI2500RS3250(XXX)25174

^{*} Designed to be used with Chesterton 442, 442C Split Mechanical Seals. Please replace "XXX" with material ID for complete part # when ordering. For a full list of materials please visit www.enviroseal.ca/spiraltrac/material or email us at support@enviroseal.ca

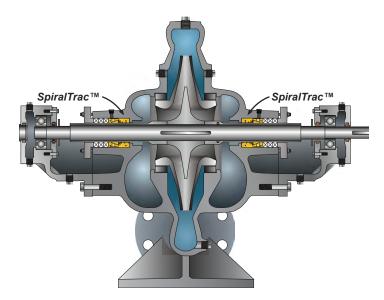

For ordering, please contact your local A.W. Chesterton representative or email support@enviroseal.ca. Proudly distributed Worldwide by:

Notes

Double ended split case pumps require both right hand (CW) and left hand (CCW) rotation SpiralTracs.

Seal Version SpiralTrac is designed to be used with Chesterton 442, 442C Split Mechanial Seals. For other seal compatibility, please reach out to support@enviroseal.ca

Packing Version SpiralTrac allows for 3 rings of packing.

EnviroSeal always recommend flow controls when installing Packing Version SpiralTrac.

Non split SpiralTrac configurations are available, email support@enviroseal.ca for details.

Find existing GOULDS successes in our literature section at enviroseal.ca

For the ultimate sealing solution, order as a Chesterton SuperSet with high quality Chesterton packing.







